

## 2003-04 ENGINE COOLING

### Specifications & Drive Belt Routing - H2



## ADJUSTMENTS

### BELT ADJUSTMENT

Application	Specification
Serpentine Belt	(1)
(1) Serpentine belt is automatically adjusted by tensioner.	

## DRIVE BELT ROUTING

**NOTE:** For serpentine belt routing, see underhood label or Fig. 1 .

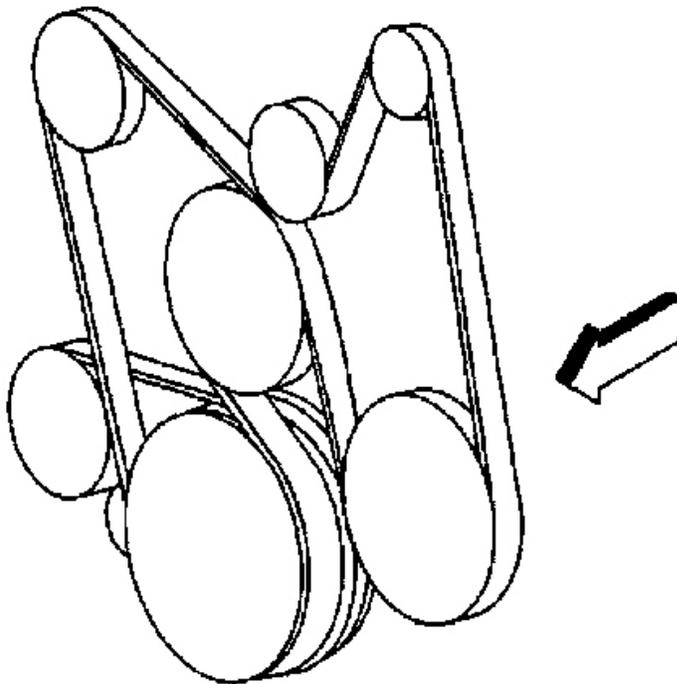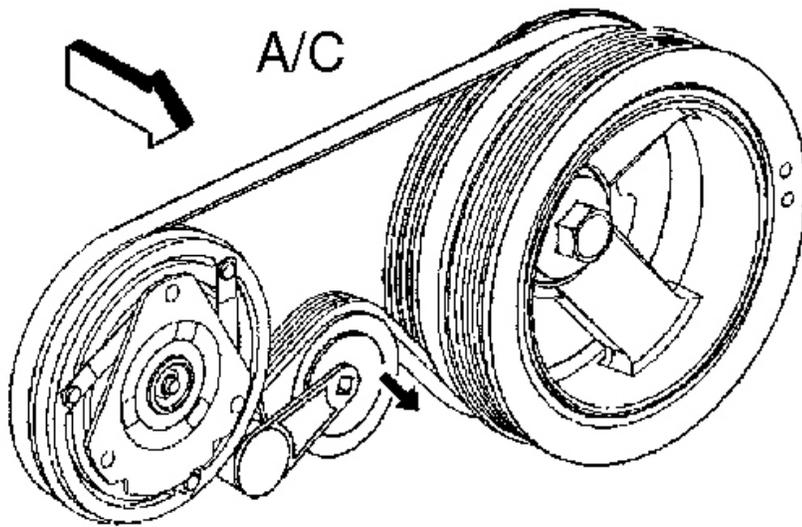

G00321454

**Fig. 1: Serpentine Belt Routing**  
Courtesy of GENERAL MOTORS CORP.

## COOLING SYSTEM SPECIFICATIONS

## COOLING SYSTEM SPECIFICATIONS

<b>Application</b>	<b>Specification</b>
Coolant Replacement Interval	<sup>(1)</sup> 150,000 Miles
Coolant Capacity <sup>(2)</sup>	13 Qts. (12.3L)
Pressure Cap	15 psi
Thermostat	
Starts To Open	188°F (87°C)
Fully Open	206°F (97°C)
<p><sup>(1)</sup> Or every 60 months, whichever comes first. Use GM Goodwrench DEX-COOL(R).</p> <p><sup>(2)</sup> Specification is approximate and includes heater capacity.</p>	